

MOBILUX®



Adjustable fixture with TL- or compact lamp.
Not only that you can take mobile light along with you, now you even can adjust it after being fixed to the wall.

Mobilux is an aluminium profile covered with a PC prismatic diffuser. The ends are closed off by plastic parts, which are necessary for the wall mounting and allow a rotation of 270°. The ray of light can be changed from direct to indirect illumination. The PC-board as well as the terminal and the TL- or compact lamp are placed inside the aluminium profile. The luminaires will be ready with a 8 or 13 W TL-lamp or with a 11 W compact lamp.

Mobilux is available in 3 different colours: Aluminium, White and Gold. The light colour #827 is identical to the light colour of an incandescent lamp therefore will accentuate the required comfortable character. The PC-board has a softstart as well as a safety circuit.



Technical data:

Operating voltage: 12 Volt DC = 10,5 - 15,0 V DC
24 Volt DC = 21,0 - 29,0 V DC

Radio interference suppression according to EN 55015 + VDE 0871 B

Operating temperature range: -20°C to +70°C

Diameter: 42mm

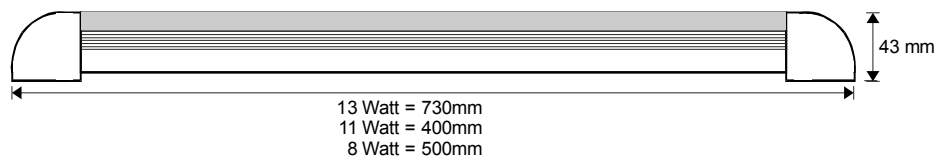

Type	Voltage	Power	Lampe
M(*) 11/12	12 Volt	11 Watt	TC-EL 11/83
M(*) 11/24	24 Volt	11 Watt	TC-EL 11/83
M(*) 8/12	12 Volt	8 Watt	TL 8/29
M(*) 8/24	24 Volt	8 Watt	TL 8/29
M(*) 13/12	12 Volt	13 Watt	TL 13/29
M(*) 13/24	24 Volt	13 Watt	TL 13/29

(*): MG= Gold MW= White MA= Aluminium