

EINBAULEUCHTE 160



Flushmounted interior ceiling luminaire, easy installation with countersunk screws hidden by the PC-cover. Economical luminaire with highlight output 11 W compact lamp. High-tech PC-board 12 or 24 Volt DC, softstart, polarity diode and patented polarity reversal protection.

163XX-0F0R for curved ceilings (radius adapted housing).

An exclusive interior lighting for commercial vehicles e.g. busses, library-, exhibition- and sales vehicles, administration and measuring vehicles or ambulances.



Technical data:

Operating voltage: 12 Volt DC = 10,5 - 15,0 V DC

24 Volt DC = 21,0 - 29,0 V DC

Radio interference suppression according to EN 55015 + VDE 0871 B

Operating temperature range: -30°C to +60°C

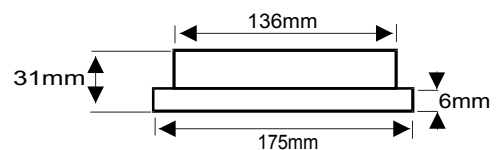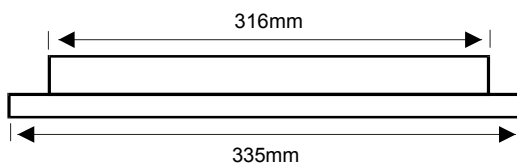

Type	Wattage
16312-0F0	1 x 11 Watt
16324-0F0	1 x 11 Watt
16312-0F0R	1 x 11 Watt
16324-0F0R	1 x 11 Watt

Voltage
12 Volt DC
24 Volt DC
12 Volt DC
24 Volt DC