


# Sunmodule®

## SW 50 mono/R

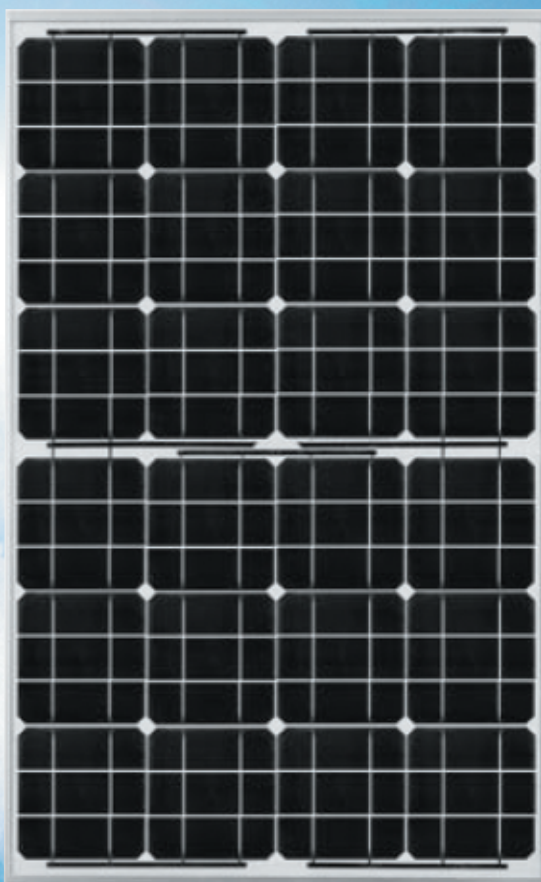

The Sunmodule® SW 50 mono/R by SolarWorld offers an innovative module concept – with designs created specifically for off-grid applications.

High efficiency crystalline silicon cell technology; enhanced by new high quality anti-reflection coatings leads to an exceptional performance.

Easy installation is assured through the field-accessible junction box and 4 mounting holes and 2 grounding holes per product.

This top-quality product represents the ideal solution for every application.

Importer:  
Arrid  
PH:: 1300 663 563  
Fax: 03 8339 0522  
Vic: 74 Sydney Rd (Hume Hwy)  
Somerton Vic 3062  
WA: 3/12 Kewdale Rd  
Welshpool WA 6106

	Module
Length:	861 mm
Width:	536 mm
Height:	34 mm
Frame:	Aluminium
Weight:	5.5 kg

Edition: June 2006



SolarWorld AG  
Kurt-Schumacher-Straße 12-14  
53113 Bonn/Germany  
Tel.: +49-228-55920-0  
E-Mail: [service@solarworld.de](mailto:service@solarworld.de)  
[www.solarworld.de](http://www.solarworld.de)

**Performance under standard test conditions (STC)**

Peak power (Pmax)	50 Wp
Maximum power point voltage (Vmpp)	16.2 V
Maximum power point current (Impp)	3.10 A
Open circuit voltage (Voc)	21.0 V
Short circuit current (Isc)	3.40 A

**Performance at 800 W/m², NOCT, AM 1.5**

Peak power (Pmax)	37 Wp
Maximum power point voltage (Vmpp)	14.5 V
Maximum power point current (Impp)	2.55 A
Open circuit voltage (Voc)	19.7 V
Short circuit current (Isc)	3.90 A

Minor reduction in efficiency under partial load conditions at 25°C: at 200 W/m²; 92 % (+/- 10 %) of the STC efficiency (1000 W/m²) is achieved.

**Component materials**

Cells per module	72
Solar cells	monocrystalline silicon
Cell dimensions	125 x 41.5 mm²

**Thermal characteristics**

NOCT	45.5°C
TK Isc	0.03 %/K
TK Voc	-0.33 %/K


**System design characteristics**

Maximum system voltage	120 V
------------------------	-------


**Rated power and maximum tolerance**

Rated power	50 Wp +/- 10 %
-------------	----------------

front view SW 50 mono/R

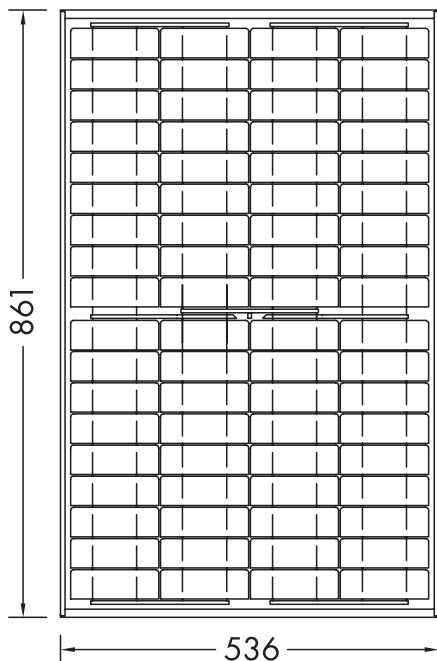

rear view SW 50 mono/R

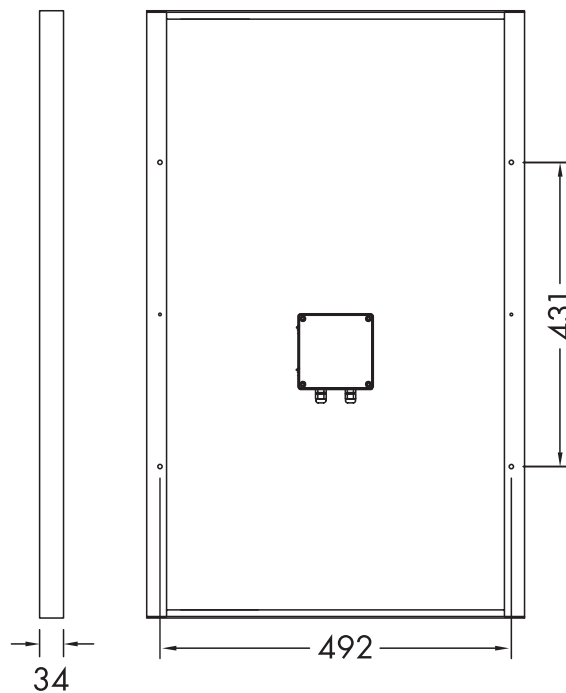

Importer:  
Arrid  
PH: 1300 663 563  
Fax: 03 8339 0522  
Vic: 74 Sydney Rd (Hume Hwy)  
Somerton Vic 3062  
WA: 3/12 Kewdale Rd  
Welshpool WA 6106